Traditionnal marine varnish n°1 Le Tonkinois



Product attributes:

Product codes:

Reference: VM/TK/N°1/12
EAN13: -
UPC: -

Product features:

Composition:
Packing: 1 L
Properties:

Product short description:

Traditional varnish single compenent consist of linseed oil, tung and natural resin.

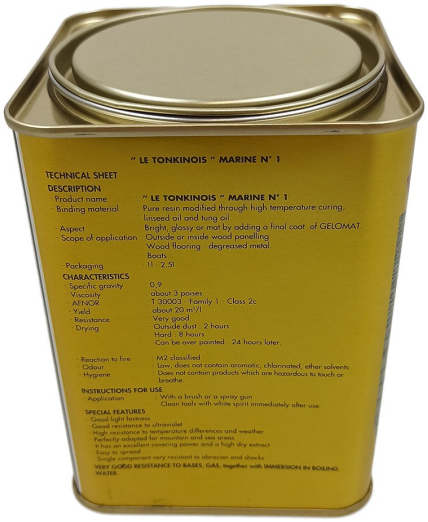
Applicableon all wooden parts above the boat's waterline, for exemple deck.

This varnish is flexible and resistant to UV and light.

Product description:

Product gallery:


1 L
20 m²
INTERIEUR
EXTERIEUR
SEC
hors poussière
2 h
ENTRE
2 COUCHES
24 h
DILUTION
NETTOYAGE
DU MATERIEL
WHITE-SPIRIT
OUTILS
MODE D'EMPLOI
Le BRILLANT MARINE N° 1 facile à étendre au pinceau couvre en moyenne 20 m² au litre pour chaque couche.
Rapidement applique, il se tend de lui-même, sans repasser le pinceau.
Prendre un pinceau bien fourni en poils naturels (soie). En première couche pour un bon traitement, le diluer à 5 % avec du White Spirit.
Application au pistolet : diluer 5 % à 10 %.
La surface à vernir devra être poncée, très propre, exempte d'humidité, de matières grasses ou d'encaustique.
A L'EXTERIEUR, vernir par temps sec, la protection est parfaite en superposant 4 couches de vernis. Attendre 24 heures au minimum entre chaque application. Pour une finition sans grains et un meilleur accrochage, poncer légèrement la surface vernie dès la première application avec un papier abrasif très fin humidifié à l'eau.
Pour une protection durable des BATEAUX en Mer, nous recommandons 5 couches du MARINE N° 1.
Résistant aux chocs et lavable, c'est aussi le plus durable des VITRIFICATEURS. Avant de vernir le parquet, il est conseillé de le nettoyer par ponçage s'il a été ciré, ne laisser aucune scure, ni poussière, passer l'aspirateur.
Chaque couche sera étendue uniformément, passer 2 à 3 couches maximum selon le bois, attendre 24 heures entre chaque couche.
Valeur limite UE pour ce produit :
(cat. A/e) : 30(g/l 2007 et 40(g/l 2010.
Ce produit contient max. 400 g/l COV.
JOUBERT
7, rue Michelet
94000 IVRY SUR SEINE
Tél. : 01 46 72 24 38
Fax : 01 46 71 62 84
3 272910 111009


" LE TONKINOIS " MARINE N° 1
TECHNICAL SHEET
DESCRIPTION
· Product name : " LE TONKINOIS " MARINE N° 1
· Binding material : Pure resin modified through high temperature curing, linseed oil and tung oil
· Aspect : Bright, glossy or mat by adding a finel coat of GELOMAT
· Scope of application : Outside or inside wood panelling
Wood flooring - degreased metal
Boats
· Packaging : 1 l - 2.5l
CHARACTERISTICS
· Specific gravity : 0.9
· Viscosity : about 3 passes
· AFNOR : T 30003 - Family 1 - Class 2c
· Yield : about 20 m²/l
· Resistance : Very good
· Drying : Outside dust : 2 hours
Hard : 8 hours
Can be over painted : 24 hours later.
· Reaction to fire : M2 classified
· Odour : Low, does not contain aromatic, chlorinated, ether solvents
· Hygiene : Does not contain products which are hazardous to touch or breathe.
INSTRUCTIONS FOR USE
· Application : With a brush or a spray gun
Clean tools with white spirit immediately after use.
SPECIAL FEATURES
· Good light fastness
· Good resistance to ultraviolet
· High resistance to temperature differences and weather
· Perfectly adapted for mountain and sea areas
· It has an excellent covering power and a high dry extract
· Easy to spread
· Single component very resistant to abrasion and shocks
VERY GOOD RESISTANCE TO BASES, GAS, together with IMMERSION IN BOILING WATER.